


Quality lighting in style

*Night, in the warm small room to turn
the pages of my book and then
gradually fall asleep, this kind
of feelings is also a
kind of happiness*

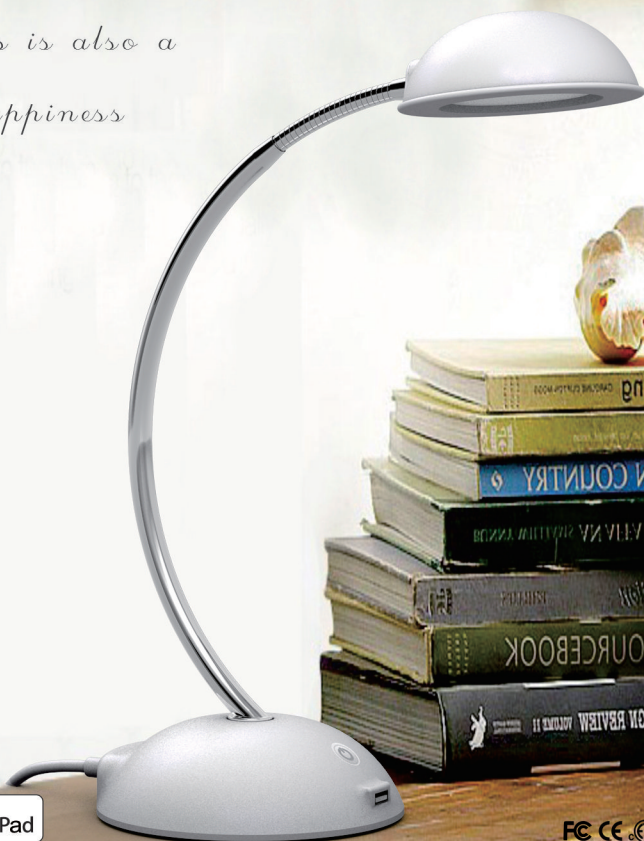

Made for

iPod iPhone iPad

FC CE RoHS

Feel good, work better

Light affects the performance of our vision and plays a vital role in creating a comfortable workspace.

Only with a correct lighting your eyes can work comfortably and free from fatigue throughout the long hours of work.

This LED desk lamp is capable to reproduce high quality light that is closely identical to natural daylight.

A comfort workspace matters, choose the right lighting for it.



Light isn't the only thing it gives



fLight E3 is more than a led desk lamp.

The built in, pioneering wifi function allows it to double as a wifi router.

Two USB sockets, unlimited power



tLight E3 Located at the front and back, the two USB sockets (Front 2.1A, Back 1.0A) allow tLight E3 to charge multiples devices at the same time

Power outage? Not a problem



Light E3 can provide up to 8 hours of lighting with
its built-in rechargeable battery.

It takes care for you devices too



tLight E3 is also an emergency power source for you to charge your phones and devices

Patent No:

Patent No.: 201620467022.3



Simple, but extraordinary

FC CE cULus RoHS

Made for



iPod



iPhone



iPad

Sleek and stylish
In seven vivid finishes,
always a colour
for the unique you!



Made for
iPod iPhone iPad

Specification

Item No.:		E3e #	E3*	E3m	E3ms	E3i	E3mi	E3msi	E3a
Light	Wattage	7	7	7	7	7	7	7	7
	Lumen	600	500	500	500	500	500	500	500
	Colour	3000K	3000K	3000K	3000K	3000K	3000K	3000K	3000K
	CRI	83	>90	>90	>90	>90	>90	>90	>90
	Dimming	Nil	5%-100%	5%-100%	5%-100%	5%-100%	5%-100%	5%-100%	5%-100%
	Switch	On/Off	Touch	Touch	Touch	Touch	Touch	Touch	Touch
	Life	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour
Head	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	
Charging	USB	Nil	2.1A	2.1A	2.1A	2.1A	2.1A	2.1A	1.0A
	Cable	Nil	Lightning**	Nil	Nil	Nil	Nil	Nil	USB Mini
	Secondard USB	Nil	1.0A	1.0A	1.0A	Nil	Nil	Nil	1.0A
Emergency	Battery	Nil	Nil	lithium	lithium	Nil	lithium	lithium	Nil
	Emergency Usage	Nil	Nil	4 hours	8 hours	Nil	4 hours	8 hours	Nil
	Light + Charging	Nil	Nil	Yes	Yes	Nil	Yes	Yes	Nil
	Battery Life	Nil	Nil	2 years	2 years	Nil	2 years	2 years	Nil
Netwrok	Transmission Speed	Nil	Nil	Nil	Nil	Legacy 802.11b/g and HT 802.11n modes			Nil
	Channel Frequency	Nil	Nil	Nil	Nil	2.4GHz (2412-2484MH)			Nil
	Modulation Mode	Nil	Nil	Nil	Nil	DSSS/CCK 11 Mbps			Nil
	Network Interface	Nil	Nil	Nil	Nil	1 10/100m self adaptive WAN/LAN port			Nil
	USB Interface	Nil	Nil	Nil	Nil	Externa Storage,Support SMB File Manage ment			Nil
	Wireless Security	Nil	Nil	Nil	Nil	WEP64/128, TKIP, AES, WPA, WPA2, WAPI			Nil
Electrical and Operating Requirements	Input Voltage	100-240V, AC							
	Power Supply	Internal	External						
	Frequency:	50Hz to 60Hz							
	Operating temperature:	32° to 95° F (0° to 35° C)							
	Relative humidity:	5% to 95% noncondensing							
	Plug	UL/VDE/PSE/BS/VDE/CCC/KS/SAA							
Construction	Material	ABS+Steel							
Colors	Body	White/Black/Red/Blue/Pink/Silver/Yellow/Blue (Eight Colors available)							
	Arm	Chrome							
Warranty		5 years warranty	2 years warranty						
Size	Product Size	378 x 150 x 150 mm							
	Box Size	210 x 55 x 275 mm	240mm x 56mm x410mm						
	Master CTN	445 x 300 x 350 mm	356mm x 260mm x430mm(6 pcs/ctn)						
	PCS/40HQ	16008	9600pcs						

Smart Packaging

www.tLight.cc

Our smart packaging design reduce its size
to only one-third of the original, hence
saving the transportation cost

