

STRIP LIGHT

Commercial Lighting Series





Model #	Size (In)	Size(mm)	Watts	Lumens	CCT (000)	CRI	Volts	PF	IP	Diffuser	Dimmable	Emergency Battery Pack #1	Motion Sensor #2
21753-DRNUSC40-WH	48 x 4.7 x 3.5"	1220 x 120 x 89 mm	40	4200	3/4/5 Switchable/single CCT	80 or 90	120 -277V	0.98	44	PMMA	O-10V dimming	Optional 400Lm 1.5H	Optional Microwave
21752-DRNUSC20-WH	24 x 4.7 x 3.5"	610 x 120 x 89 mm	20	2100	3/4/5 Switchable/single CCT	80 or 90	120- 277V	0.98	44	PMMA	O-10V dimming	Optional 400Lm 1.5H	Optional Microwave




http://www.tlight.cc/down11/tLight_Strip_Light_Series.pdf

Photometrics




BUD Rating: B1-U3-G2

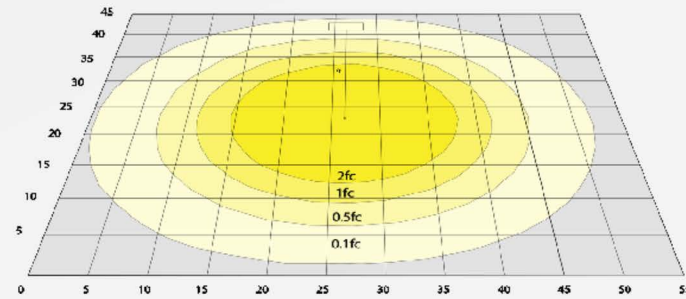

Area 45'x 55' Mounting Height: 9'


Optional Accessories

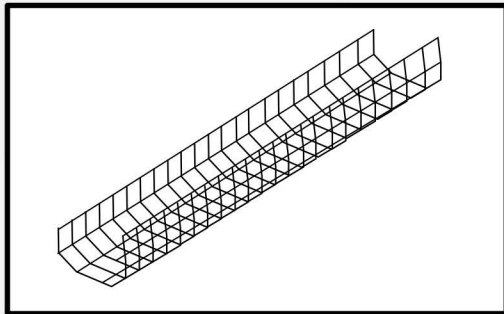


Protection Frame, #PF1



Reflector, #RF1

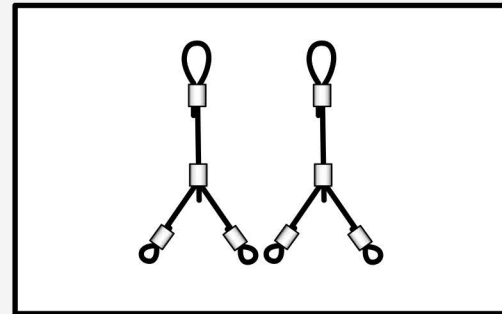

Hanger, #CLH5

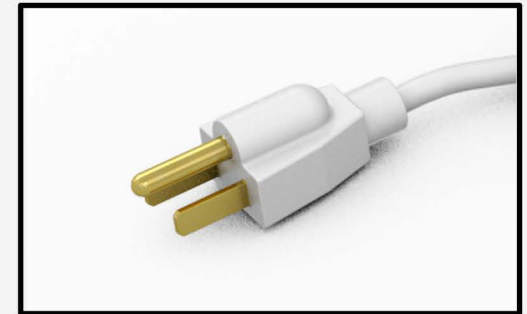

Plug #CP3

Optional Microwave Sensor


Model #: PCM01

Input: AC 120V or 240v, 50/60Hz

Output: AC 120V or 240v, 50/60Hz

Current: 3A

Microwave Sensor



Sensor	DetectionRange	DetectionArea	DetectionAngle	DaylightSensor	HoldTime
Microwave	Max14M	10%/50%/75%/100%	180	2/10/50 lux/Disable	5s/90s/5min/15min

#Operating Temperature: -22oF -104oF

##Ordering example: 21753-DRNUSC40-WH-E10-PCM01: 48" Strip light 80 CRI, 40W, Switchable CCT 3/4/5000K, with Emergency Battery Pack, and Microwave sensor