tLight

TABLE LAMP SERIES

Download our App for iPhone & Andriod:

Google play
Available on the
App Store
Search tlight

Made for
iPod iPhone

CEC
CE
TITLE 24
CA Compliant
ENERGY STAR
cETLus Intertek
JA8 ✓RoHS

www.tlight.cc

tLight|E3e

QUALITY LIGHTING IN STYLE

Night, in the warm small room to turn the pages of my book and then gradually fallasleep, this kind of feelingls is also a kind of happiness
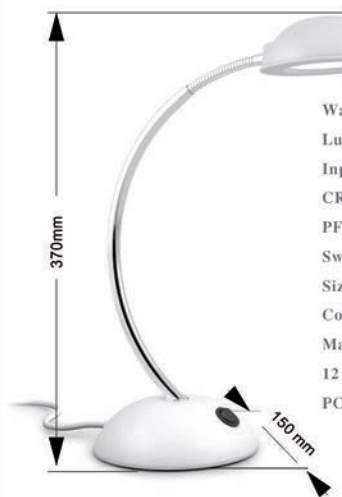
Lighting is the key to a pleasant workspace

Built with quality and technology

This is the light that can make all the difference

FC CE cETLus RoHS

Wattage: 7W

Lumen: 600 LM

Input Voltage: 100-240V AC

CRI > 83

PF > 0.85

Switch: On/Off

Size: 370 x 150 x 150 mm

Color Box: 210 x 55 x 275 mm

Master Carton: 435 x 290 x 340 mm, 12 pcs/ctn

PCS/40HQ: 16000 pcs

370mm

150 mm

tLight|E3

Light isn't the only thing it gives

Wireless

tLight E3 is more than a led desk lamp.

The built in, pioneering wifi function allows it to double as a wifi router.

Patent No:

Patent No.: 201620467022.3

- "True Color" LED Light for purest form of light
- Built-in WiFi router & repeater to connect to the Internet
- Up to 8 hours of extra power with built-in battery
- Connect Flash memory or USB hard drive for wirelss backup of your devices

The only LED "True Color" desklamp that includes a built-in WiFi router and repeater, plus an 8 hour backup battery for "emergency power" all-in-one lamp.

cate
quisite
top to bottom

USB
CHARGING

DIMMABLE
LED LIGHT

WiFi
ROUTER

EMERGENCY LIGHTING
POWER STORAGE

- Steering universal joint
- True Color⁴ 7W LED light, 3000K
- KD Port
- Network input
- USB for Flash Memory & Hard Drive
- Reset
- Output 12V DC
- LED light switch
- USB 2.1A

LED "True Color" light reduces eye fatigue.

tLIght reinvents what an LED desk light can do.

FEATURES

Light
True Color 7W LED light, 3000K, 500 lumens
Touch Dimmer, continuously dimmable from 10% to 100%
CRI > 90

Charging
USB 2.1A port for charging all iPhones, iPads, iPods and most smart phones
Secondary USB 0.5A for low power devices

Portable & Emergency Power
Built in 10,000 mAH lithium battery
Up to 8 hours usage of light and charging

Network
802.11b/g and HT 802.11n modes
10/100M Self-adaptive WAN/LAN port
USB supports MSB file management
WEP64/128, TKIP, AES, WPA, WPA2, WAPI Security
Easy Setup via iPhone, iPad, Smart Phone or PC

Design
Chrome arm with ABS body
Size: 370 x 150 x 150 mm

Selection of color:

☐ White   ☐ Red   ☐ Yellow   ☐ Black
☐ Blue   ☐ Silver ☐ Green   ☐ Pink

FC CE RoHS

Built-in rechargeable battery gives you 8 hours of power for mobile devices or emergency lighting.

Power when you need it most with the E3's built-in lithium battery.

Specification

Item No.:		E3e #	E3*	E3m	E3ms	E3i	E3mi	E3msi	E3a
Light	Wattage	7	7	7	7	7	7	7	7
	Lumen	600	500	500	500	500	500	500	500
	Colour	3000K	3000K	3000K	3000K	3000K	3000K	3000K	3000K
	CRI	83	>90	>90	>90	>90	>90	>90	>90
	Dimming	Nil	**5%-100%**	**5%-100%**	**5%-100%**	**5%-100%**	**5%-100%**	**5%-100%**	**5%-100%**
	Switch	On/Off	Touch	Touch	Touch	Touch	Touch	Touch	Touch
	Life	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour	>50,000 hour
	Head	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Charging	USB	Nil	2.1A	2.1A	2.1A	2.1A	2.1A	2.1A	1.0A
	Cable	Nil	Lightning**	Nil	Nil	Nil	Nil	Nil	USB Mini
	Secondard USB	Nil	**1.0A**	**1.0A**	**1.0A**	Nil	Nil	Nil	**1.0A**
Emergency	Battery	Nil	Nil	lithium	lithium	Nil	lithium	lithium	Nil
	Emergency Usage	Nil	Nil	4 hours	8 hours	Nil	4 hours	8 hours	Nil
	Light + Charging	Nil	Nil	Yes	Yes	Nil	Yes	Yes	Nil
	Battery Life	Nil	Nil	**2 years**	**2 years**	Nil	**2 years**	**2 years**	Nil
Netwrok	Transmission Speed	Nil	Nil	Nil	Nil	Legacy 802.11b/g and HT 802.11n modes			Nil
	Channel Frequency	Nil	Nil	Nil	Nil	2.4GHz (2412-2484MH)			Nil
	Modulation Mode	Nil	Nil	Nil	Nil	DSSS/CCK 11 Mbps			Nil
	Network Interface	Nil	Nil	Nil	Nil	**1 10/100m self** adaptive WAN/LAN port			Nil
	USB Interface	Nil	Nil	Nil	Nil	Externa Storage,Support SMB File Manage ment			Nil
	Wireless Security	Nil	Nil	Nil	Nil	WEP64/128, TKIP, AES, WPA, WPA2, WAPI			Nil
Electrical and Operating Requirements	Input Voltage	100-240V, AC							
	Power Supply	Internal	External						
	Frequency:	50Hz to 60Hz							
	Operating temperature:	32° to 95° F (0° to 35° C)							
	Relative humidity	5% to 95% noncondensing							
	Plug	UL/VDE/PSE/BS/VDE/CCC/KS/SAA							
Construction	Material	ABS+Steel							
Colors	Body	White/Black/Red/Blue/Pink/Silver/Yellow/Blue (Eight Colors available)							
	Arm	Chrome							
Warranty		5 years warranty	2 years warranty						
Size	Product Size	378 x 150 x 150 mm							
	Box Size	210 x 55 x 275 mm	**240mm x 56mm x410mm**						
	Master CTN	445 x 300 x 350 mm	**356mm x 260mm x430mm(6 pcs/ctn)**						
	PCS/40HQ	16008	9600pcs						

Made for iPod iPhone iPad

Energy   Star V.2 Qualified

"** Lightning Cable only provided at specified countries"

FC CE c(UL)us RoHS

tLight|E4

- "True Color" LED Light for purest form of light
- Control mood and brightness with dimming from 5%-100%
- Charge mobile devices with built-in USB 2.1A
- Up to 8 hours of extra power with built-in battery
- Built-in WiFi router & repeater to connect to the Internet
- Connect Flash memory or USB hard drive for wirelss backup of your devices

The only LED "True Color" desklamp that includes a built-in WiFi router and repeater, plus an 8 hour backup battery for "emergency power" all-in-one lamp.

USB CHARGING

DIMMABLE LED LIGHT

WIFI ROUTER

EMERGENCY LIGHTING POWER STORAGE

- True Color® 7W LED light, 3000K
- Steering universal joint
- KD Port

- KD Port
- WAN/LAN port
- Output 5V DC
- USB MSB file management
- LED light switch/dimmer
- Reset
- USB 2.1A

FEATURES

Light
True Color 7W LED light, 3000K, 500 lumens
Touch Dimmer, continuously dimmable from 5% to 100%
CRI > 90

Charging
USB 2.1A port for charging all iPhones, iPads, iPods and most smart phones
Secondary USB 0.5A for low power devices

Portable & Emergency Power
Built in 10,000 mAH lithium battery
Up to 8 hours usage of light and charging

Network
802.11b/g and HT 802.11n modes
10/100M Self-adaptive WAN/LAN port
USB supports MSB file management
WEP64/128, TKIP, AES, WPA, WPA2, WAPI Security
Easy Setup via iPhone, iPad, Smart Phone or PC

Design
Size:150X430X425mm(5.9X16.9X16.7")
Power: AC 100-240V, 50/60Hz DC output 12V

Selection of color:
□ White   □ Red   □ Yellow   □ Black
□ Blue   □ Silver   □ Green   □ Pink

FC CE RoHS

LED "True Color" light reduces eye fatigue.

Built-in WiFi Router and Repeater turns any room into a connected room.

A color for every mood and every interior.

Power when you need it most wth the E4's built-in lithium battery.

tLight|E5

The Most Talented Light

This is not just a desk lamp, this is the first LED desk lamp built in WiFi Router
and Repeater in the world. It introduces 8 hours emergency battery for both
lighting and charging. The best "True Color" light for human eyes.
It charges all iPhone/iPad/iPod/Smartphone. It provides a secondary
USB for Flash Memory and Harddrive for data remote backup.
And more important, it changes the world of reading and
working.
This is the tLight E5, everything on it is for
changing the life style.

·WiFi Router and Repeater
·8 hours Emergency battery storage
·USB charging ports
·And not to forget, the best LED "True Color" [#] light

410mm (16.1") 150mm (5.9")

Light
True Color, 5W, LED Light, 3000K, 450 lumens
Touch Dimmer, continuously dimmable from 5% to 100%
Flawless LED, light last up to 45 years at average 3 hours usage per day
CRI > 90

Charging
USB 2.1A for charing all iPhones, iPads, iPods and most smart phones
Secondary USB port 1.0A for charging all iPhones

Portable & Emergency Power (E5ms, E5msi)
Built in 10,000 mAH lithium battery
Up to 8 hours usage of light and charging * (8 hours usage at 150 lumens output)

Network (E5msi, E5i)
802.11b/g and HT 802.11n modes WiFi Router & Repeater
10/100M adaptive WAN/LAN port
USB supports SMB file management
WEP64/128, TKIP, AES, WPA, WPA2, WAPI Security
Easy Setup via iPhone, iPad, Smart Phone or PC by input the 192.168.168.1 at your browser in your devices.
Optional tLight InControl Home Automation gateway (E5msia, E5ia)

Design
Aluminium Head with Chrome arm with ABS body
Size: 460 x 420 x 150 mm
Color Box: 360 x 220 x 68 mm
Pcs/40HQ: 9000 pcs

Electrical and Operating Requirements
Input Voltage 100V-240V AC
Power Supply: External with 1M input cable
Power Output: 12V DC (E5ms, E5msi) 5V DC (E5i, E5msi)
Frequency: 50Hz to 60 Hz
Operating Temperature 32F to 90F (0C – 35C)
Relative Humidity: 5% to 95% noncondensing
Warranty: 2 years warranty

FC CE RoI

Wireless
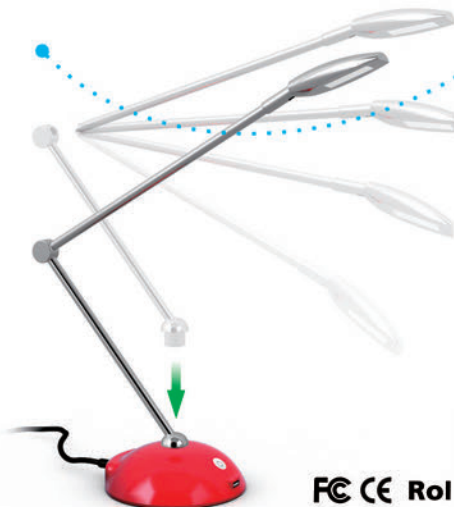
tLight S3

We hate clutter as much as you do, that's why we created the tLight- One desk lamp that has all the gadgets you need.

tLight is the first company to include in one unique LED desk lamp

* Dock for all iPhone 5/6/7/7Plus, iPod with lightning connector
* USB Charging port for all iPod, iPhone and iPad
* High qualify Speakers
* Bluetooth 4.0
* WiFi Router & Repeater
* Connect Flash memory or USB hard drive of wireless backup of your devices
* Remote control for music and light
* And not to forget, the best LED "True Color" light

Made for
iPod iPhone iPad

HI-FI SYSTEM

With its built-in high-quality sound system, you can always listen to your favourite song anytime, any mood. It's the best companion for your desk

Built-in dual high-fidelity speakers

Just simply plug your phone onto the dock and you can enjoy crisp and clean music while it charges your phone!

Bluetooth

Wireless

USB CHARGING

DIMMABLE LED LIGHT

iPhone

Not only does the tLight delivers light and sound, but also wifi!

With the built-in Wifi feature, you can turn your tLight into a wifi router or a repeater, providing the best internet coverage for your room

Wireless

Beauty, strength and innovative and unique functionality. It's all in our specs.

light

True Color, 10W, LED Light, 3000K, 600 lumens

Touch Dimmer, continuously dimmable from 5% to 100%

Remote dimmer

Flawless LED, light last up to 45 years at average 3 hours usage per day

CRI > 90

Music

2X5W speakers

Dock for all iPhone 5/6/6s/7 adn iPod with Lightning connector to play music

iPhone/iPod/iPad/MacBook equipped with Bluetooth and works with most smart phones

Remote control supplied Audio out port

Charging

Dock for all iPhone 5/6/6s/7 /7 plus and iPod with Lightning connector

USB 2.1A for charging all iPhones,iPads, iPods and most smart phones

Networking

802.11b/g and HT 802.11n modes

10/100M Self-adaptive WAN/LAN port

USB supports SMB file management, connect Flash memory or USB hard drive of wireless backup of your devices

WEP64/128, TKIP, AES, WPA, WPA2, WAPI Security

Easy Setup via iPhone, iPad, Smart Phone or PC by input the 192.168.168.1 at your browser in your devices.(Feature available with S3i)

Design

Silver Finish with Aluminium with ABS body

Size: 170 x 255 x 420 mm

Specification

Model No.:		S3	S3i
Light	Wattage		10
	Lumen		600
	Color		3000K
	CRI		>90 "True Color"
	Dimming		5%-100%
	Switch		Touch (Remote dimmer as well)
	Life		>50,000 hours
	Head		Adjustable
Charging	Lightning Dock		All iPhone 5/6/6s/7/7Plus, iPods with Lightning coonector
	USB		2.1A for charging all iPhones, iPads, iPods and smart phones
Music	Lightning Dock		All iPhone 5/6/6s/7/7Plus, iPods with Lightning coonector
	Speaker		2x5W, High Quality Speakers
	Decoding & Processor		Apple V2.0C Chip and ST processor
	Bluetooth		4.0 compatible form 2.0 to 4.0
	Remote control		Fully control for both Light & Music
	Audio out port		3.5 mm
Netwrok	Transmission Speed	Nil	Legacy 802.11b/g and HT 802.11n modes
	Channel Frequency	Nil	2.4GHz (2412-2484 MH)
	Modulation Mode	Nil	DSSS/CCK 11 Mbps
	Network Interface	Nil	1 10/100m self-adaptive WAN/LAN port
	USB Interface	Nil	externa storage, Support SMB file management
	Wireless Security	Nil	WEP64/128, TKIP, AES, WPA, WPA2, WAPI
Electrical and Operating Requirements	Input Voltage		100-240V, AC
	Power Supply		External (12V, DC)
	Frequency:		50Hz to 60Hz
	Operating temperature:		32° to 95° F (0° to 35° C)
	Relative humidity:		5% to 95% noncondensing
	Plug		UL/VDE/PSE/BS/VDE/CCC/KS/SAA
Construction	Material		ABS+Steel+Aluminium
Color			Silver (optional finish available)
Warranty			2 years warranty
Size	Product Size		170mm x 255mm x 420mm
	Product Weight		1015g(S3i,1025g)
	Box Size		240mm x 60mm x 410mm
	Master CTN		375mm x 255mm x 430mm(6 pcs/ctn)
	PCS/40HQ		9180pcs

Made for
iPod iPhone iPad

FC CE RoHS

tLight | S3x

Besides developing the best lit, healthiest and the most natural LED lighting, tLight has turned the desk lamp into the ultimate hub for all your mobile devices and connectivity!

Made for
iPod iPhone

The tLight product lineup includes all Apple certified parts and connectors.

tLight has a 20 year hisory of developing lighting products for industry, institutions and governments all over the world. Our product development starts with a committment to quality.

You have power, even when the power goes out!

The tLight desk lamps have the power to spare, as some models include an emergency battery backup that will last for up to 8 hours. So you never will be without power for lighting and charging your devices. No matter if your power goes out inside, or even if you want to take the light outside.

Wireless

USB CHARGING

DIMMABLE LED LIGHT

EMERGENCY LIGHTING POWER STORAGE
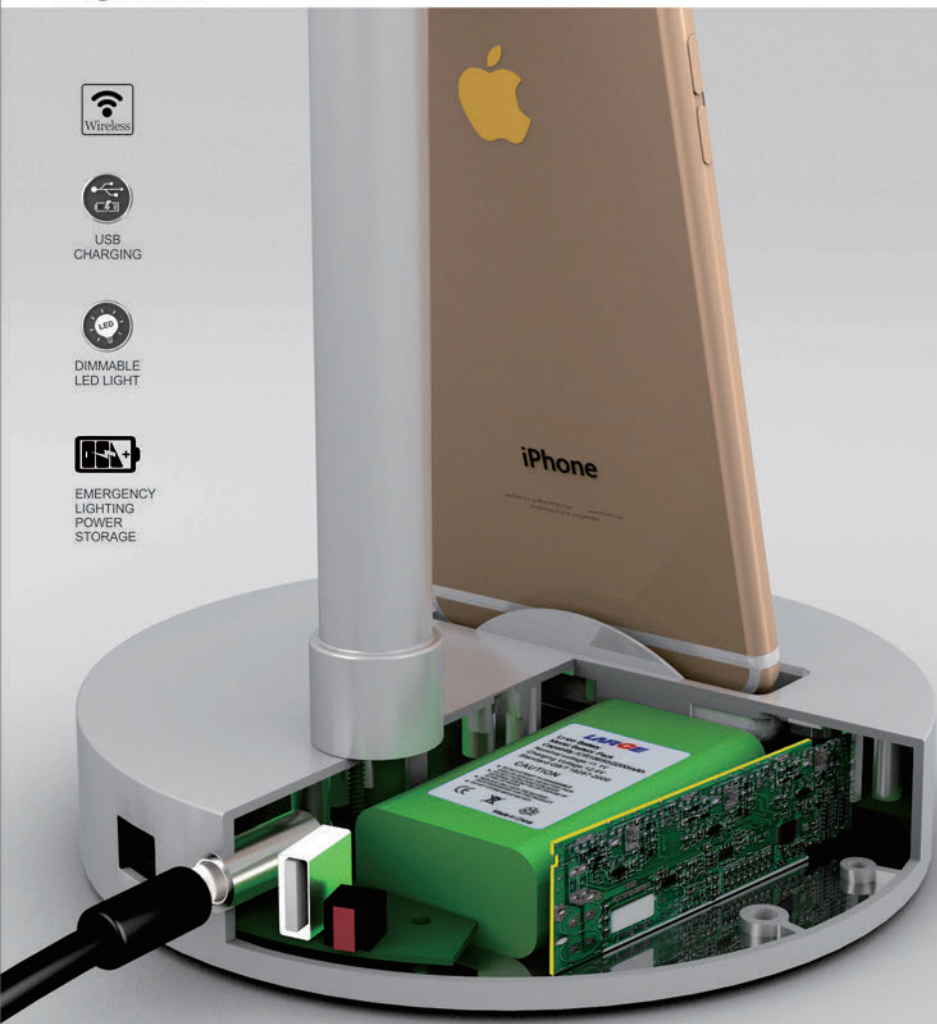
tLight desk lamps deliver great light and better WiFi!

No longer will your strain your eyes with poor LED lighting, you will also have a stronger connection to the Internet.
tLight's built-in WiFi Router and Repeater makes it easier to connect to the internet then ever before.

Wireless

Beauty, strength and innovative and unique functionality. It's all in our specs.

410mm

150 mm

Light
True Color, 7W, LED Light, 3000K, 500 lumens
Touch Dimmer, continuously dimmable from 5% to 100%
Flawless LED, light last up to 45 years at average 3 hours usage per day
CRI > 90

Charging
Dock for all iPhone 5/6/6s/7 and iPods with Lighting connector
USB 2.1A for charing all iPhones, iPads, iPods and most smart phones

Portable & Emergency Power
Built in 10,000 mAH lithium battery
Up to 8 hours usage of light and charging (8 hours usage at 2W light output with 150 lumens)
(Feature available with S3xms, S3xmsi)

Network
802.11b/g and HT 802.11n modes
10/100M Self-adaptive WAN/LAN port
USB supports SMB file management
WEP64/128, TKIP, AES, WPA, WPA2, WAPI Security
Easy Setup via iPhone, iPad, Smart Phone or PC by input the 192.168.168.1 at your browser in your devices.
(Feature available with S3xi, S3xmsi)

Design
Silver Finish with Aluminium and ABS body
Size: 150 x 270 x 410 mm

FC CE RoHS

Made for
iPod iPhone

Wireless

Specification

Model No.:		S3x	S3xms	S3xi	S3xmsi
Light	Wattage			7	
	Lumen			500	
	Color			3000K	
	CRI			>90	
	Dimming			5%-100%	
	Switch			Touch	
	Life			>50,000 hours	
	Head			Adjustable	
Charging	Lightning Dock			All iPhone 5/6/6s/7, iPods with Lightning coonector	
	USB			2.1A for charging all iPhones, iPads, iPods and smart phones	
Emergency	Battery	Nil	10000mAH	Nil	10000mAH
	Emergency usage#	Nil	8 hours	Nil	8 hours
	Light + Charging	Nil	Yes	Nil	Yes
	Battery Life	Nil	2 years	Nil	2 years
Netwrok	Transmission Speed	Nil	Nil	Legacy 802.11b/g and HT 802.11n modes	
	Channel Frequency	Nil	Nil	2.4GHz 2412-2484 MH	
	Modulation Mode	Nil	Nil	DSSS/CCK 11 Mbps	
	Network Interface	Nil	Nil	1 10/100m self-adaptive WAN/LAN port	
	USB Interface	Nil	Nil	externa storage, Support SMB file management	
	Wireless Security	Nil	Nil	WEP64/128, TKIP, AES, WPA, WPA2, WAPI	
Electrical and Operating Requirements	Input Voltage			100-240V, AC	
	Power Supply			External	
	Frequency:			50Hz to 60Hz	
	Operating temperature:			32° to 95° F (0° to 35° C)	
	Relative humidity:			5% to 95% noncondensing	
	Plug			UL/VDE/PSE/BS/VDE/CCC/KS/SAA	
Construction	Material			ABS+Steel+Aluminium	
Color				Silver	
Warranty				2 years warranty	
Size	Product Size			150 x 270 x 410mm	
	Product Weight	680 g	860 g	690 g	870 g
	Box Size			240mm x 50mm x 410mm	
	Master CTN			315mm x 255mm x 430mm(6 pcs/ctn)	
	PCS/40HQ			10980pcs	

Made for
iPod iPhone

FC CE RoHS

tLight|S2

L ght
- True Color[#] 10W LED light, 3000K
- Touch dimmer & remote control dimmer

Music
- 2x5W speakers
- Dock for all iPhone 5/6/6s and iPods with Lightning connector to play music
- iPhone/iPad/iPod/MacBook equipped with Bluetooth and works with most smart phones
- Remote control supplied
- Audio Out port

Charging
- Dock for charging iPhone 5/6/6s and iPods with Lightning connector
- USB 2.1A port for charging all iPhones, iPads, iPods and most smart phones

Design
- Red and White color available
- Size: 170 x 255 x 420 mm

tLight|S2x

Light
. True Color [#] 7W LED light, 3000K
. Touch dimmer

Charging
. Dock for all iPhone 5/6 and iPods with Lightning connector
. USB 2.1A port for charging all iPhones, iPads, iPods and most smart phones

Design
· *Red and white color available*
. Size: 150 x 270 x 410 mm .

www.tlight.cc

CRI > 90

25251-IDC10-CH
25251-E26H2710-CH
25251-E27H2710-CH

500mm

450mm

| IP20 | | | ETL Intertek | CEC | CE | RoHS | TITLE 24 CA Energy Saving | JA8 |

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25251-IDC10-CH	310 x 450 x 500	10	App	1000	2700-6400	90	100 or 240	60	Fabric	
25251-E26H2710-CH	310 x 450 x 500	10	Rotate Dimmer	800	2700	90	120	60	Fabric	Brushed Nickel,
25251-E27H2710-CH	310 x 450 x 500	10	Rotate Dimmer	800	2700	90	120	60	Fabric	Chrome

ON
OFF
WIFI

25414-E26H2710-CH

25414-E27H2710-CH

500mm

330mm

IP20 RoHS JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25414-E26H2710-CH	150×150×420	10	On/Off Switch	800	2700	90	120	60	Metal	Silver, Black, White
25414-E27H2710-CH	150×150×420	10	On/Off Switch	800	2700	80	240	60	Metal	

25405-GU24H2710-BK
25405-E27N2710-BK

470mm

260mm

IP20 | ETL intertek | CEC | CE | RoHS | TITLE CA 24 Energy Saving | JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25405-GU24H2710-BK	260 x 150 x 470	10	On/Off Switch	800	2700	90	120	60	Metal	Black,
25405-E27N2710-BK	260 x 150 x 470	10	On/Off Switch	800	2700	80	240	60	Metal	White,
										Silver

25253-IDC10-CH
25253-E26H2710-CH
25253-E27H2710-CH

500mm

330mm

IP21 | ETL Intertek | CEC | CE | RoHS | TITLE 24 CA | Energy Saving | JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25253-IDC10-CH	ø330×500	10	App	1000	2700-6400	90	100 or 240	60	Fabric	
25253-E26H2710-CH	ø330×500	10	Rotate Dimmer	800	2700	90	120	60	Fabric	Brushed Nickel,
25253-E27H2710-CH	ø330×500	10	Rotate Dimmer	800	2700	80	240	60	Fabric	Chrome

25252-IDC10-CH
25252-E26H2710-CH
25252-E27H2710-CH

615mm

350mm

| IP20 | | | | | | | | RoHS | TITLE 24 CALIFORNIA | Energy Saving | JA8 |

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25252-IDC10-CH	210×350×615	10	App	1000	2700-6400	90	100 or 240	60	Fabric	Brushed Nickel, Chrome
25252-E26H2710-CH	210×350×615	10	Rotate Dimmer	800	2700	90	120	60	Fabric	
25252-E27H2710-CH	210×350×615	10	Rotate Dimmer	800	2700	80	240	60	Fabric	

75349

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75349	320 x 150 x 354	7	On/Off Switch	600	3000	90	100-240	60	PMMA	White, Black, Red, Blue, Green, Orange, Pink, Silver

75355-RD

354mm

320mm

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75355-RD	354 x 320 x 150	7	On/Off Switch	600	3000	90	100-240	60	PMMA	White, Black, Red, Blue, Green, Orange, Pink, Silver

75354-RD

354mm

320mm

		IP20				CE	RoHS		

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75354-RD	354 x 320 x 150	7	On/Off Switch	600	3000	90	100-240	60	PMMA	White, Black, Red, Blue, Green, Orange, Pink, Silver

75049

356mm

239mm

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75049	239x 356 x 120	7	On/Off Switch	600	3000	90	100-240	60	PMMA	Brushed Nickel, Chrome

IP20 · ETL Intertek · CEC · CE · RoHS · TITLE 24 CA · Energy Saving · JA8

75092

434mm

381mm

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75092	381x 150 x 434	7	On/Off Switch	600	3000	90	100-240	60	PMMA	Brushed Nickel, Chrome

IP21 | RoHS | CE | JA8

75110

376mm

284mm

				IP20				RoHS	TITLE 24		JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75110	284x 150 x 376	7	On/Off Switch	600	3000	90	100-240	60	PMMA	Brushed Nickel, Chrome

75013

425mm

155mm

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
75013	425x 140 x 155	7	On/Off Switch	600	3000	90	100-240	60	PMMA	Brushed Nickel, Chrome

25438-GU24H2710-BN
25438-E27H2710-BN

476mm

150mm

| IP20 | | | | | | IP20 | | | | | RoHS | TITLE 24 CA Compliant | Energy Saving | JA8 |

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25438-GU24H2710-BN	150×150×476	10	On/Off Switch	800	2700	90	120	60	Plastic	Brushed Nickel,
25438-E27H2710-BN	150×150×476	10	On/Off Switch	800	2700	80	240	60	Plastic	Chrome

25624-GU24H2710-BN
25624-E27H2710-BN

420mm

150mm

IP20 | JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25624-GU24H2710-BN	150×150×420	10	On/Off Switch	800	2700	90	120	60	Plastic	BSilver,
25624-E27H2710-BN	150×150×420	10	On/Off Switch	800	2700	80	240	60	Plastic	Black,
										Whit

25410-GU24H2710-BN

25410-E27H2710-BN

420mm

150mm

	IP20		ETL Intertek	CEC	CE	RoHS	TITLE 24 CA Compliant	Energy Saving	JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25410-GU24H2710-BN	150×150×420	10	On/Off Switch	800	2700	90	120	60	Metal	Silver,
25410-E27H2710-BN	150×150×420	10	On/Off Switch	800	2700	80	240	60	Metal	Black,
										White

25003-GU24H2710-BN

25003-E27H2710-BN

482mm

127mm

| IP20 | | | | | | CE | RoHS | TITLE 24 CA | | JA8 |

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25003-GU24H2710-BN	127×127×482	10	On/Off Switch	800	2700	90	120	60	PMMA	Brushed Nickel,
25003-E27H2710-BN	127×127×482	10	On/Off Switch	800	2700	80	240	60	PMMA	Chrome

25129-GU24H2710-BN

25129-E27H2710-BN

368mm

267mm

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25129-GU24H2710-BN	267×267×368	10	On/Off Switch	800	2700	90	120	60	GLASS	Brushed Nickel,
25129-E27H2710-BN	267×267×368	10	On/Off Switch	800	2700	80	240	60	GLASS	Polished Brass

25135-GU24H2710-BN

25135-E27H2710-BN

368mm

254mm

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25135-GU24H2710-BN	254×254×368	10	On/Off Switch	800	2700	90	120	60	GLASS	Brushed Nickel,
25135-E27H2710-BN	254×254×368	10	On/Off Switch	800	2700	80	240	60	GLASS	Polished Brass

IP20 RoHS CE JA8

25008-GU24H2710-BN
25008-E27H2710-BN

600mm

380mm

IP21 · RoHS · CE · JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25008-GU24H2710-BN	254×254×330	10	On/Off Switch	800	2700	90	120	60	GLASS	Brushed Nickel,
25008-E27H2710-BN	254×254×330	10	On/Off Switch	800	2700	80	240	60	GLASS	Polished Brass

29001-GU24H2710-BN

29001-E27H2710-BN

330mm

254mm

IP20 | JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
29001-GU24H2710-BN	254×254×330	10	On/Off Switch	800	2700	90	120	60	GLASS	Brushed Nickel,
29001-E27H2710-BN	254×254×330	10	On/Off Switch	800	2700	80	240	60	GLASS	Polished Brass

25225-GU24H2710-BK

25225-E27N2710-BK

485mm

385mm

IP20 | JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25225-GU24H2710-BK	ø305×485	10	On/Off Switch	800	2700	80	120	60	Fabric	Black,
25225-E27N2710-BK	ø305×485	10	On/Off Switch	800	2700	80	240	60	Fabric	Dark Bronze

25215-IDC10-BN

25215-GU24H2710-BN

25215-E27H2710-BN

600mm

380mm

IP20

ETL Intertek

CEC

CE

RoHS

TITLE 24 CA

Energy Saving

JA8

ON OFF

WIFI

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25215-IDC10-BN	ø380×600	10	App	1000	2700-6400	90	100 or 240	60	Fabric	Brushed Nickel, Polished Brass
25215-GU24H2710-BN	ø380×600	10	Rotate Dimmer	800	2700	90	120	60	Fabric	
25215-E27H2710-BN	ø380×600	10	Rotate Dimmer	800	2700	80	240	60	Fabric	

25001-GU24H2710-BN
25001-E27H2710-BN

480mm

300mm

IP20 | JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25001-GU24H2710-BN	ø300×480	10	On/Off Switch	800	2700	90	120	60	Fabric	Brushed Nickel, Anti Brass
25001-E27H2710-BN	ø300×480	10	On/Off Switch	800	2700	80	240	60	Fabric	

25009-IDC10-BN

25009-GU24H2710-PB

25009-E27H2710-PB

600mm

380mm

ON

OFF

WIFI

IP20

Intertek

CEC

CE

RoHS

TITLE 24 CA

Energy Saving

JA8

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25009-IDC10-BN	ø380×600	10	App	1000	2700-6400	90	100 or 240	60	Fabric	Brushed Nickel, Polished Brass
25009-GU24H2710-PB	ø380×600	10	Rotate Dimmer	800	2700	90	120	60	Fabric	
25009-E27H2710-PB	ø380×600	10	Rotate Dimmer	800	2700	80	240	60	Fabric	

25215-IDC10-BN
25215-GU24H2710-BN
25215-E27H2710-BN

600mm

380mm

IP20

ETL Intertek

CEC

CE

RoHS

TITLE CA 24

Energy Saving

JA8

ON OFF

WIFI

Model#	Size(mm)	Watts	Control	Lumens	CCT	CRI	Volts	Equ.Inc.	Diffuser	Finish Available
25215-IDC10-BN	ø380×600	10	App	1000	2700-6400	90	100 or 240	60	Fabric	Brushed Nickel, Polished Brass
25215-GU24H2710-BN	ø380×600	10	Rotate Dimmer	800	2700	90	120	60	Fabric	
25215-E27H2710-BN	ø380×600	10	Rotate Dimmer	800	2700	90	120	60	Fabric	